


5106/00x-0x | 5506/00x-0x | 5006/00x-0x




Polyfin Anschlussmanschetten



Application

Packaging

Sleeve type	colour	article number	inner diameter	hight	packaging unit
Sealing sleeve A					
	light grey	5106 / 001-00	15 mm - 30 mm	12 cm	5 pcs. / box
	white	5506 / 001-00	15 mm - 30 mm	12 cm	5 pcs. / box
	black	5006 / 001-00	15 mm - 30 mm	12 cm	5 pcs. / box
<i>with stainless steel clamping ring for upper securement</i>					
Sealing sleeve C					
	light grey	5106 / 005-03	16 mm - 20 mm	24 cm	5 pcs. / box
	white	5506 / 005-03	16 mm - 20 mm	24 cm	5 pcs. / box
	black	5006 / 005-03	16 mm - 20 mm	24 cm	5 pcs. / box
<i>With shrink tubing for upper protection, otherwise identical to sleeve C</i>					
Sealing sleeve CS					
	light grey	5106 / 005-03-S	8 mm - 20 mm	24 cm	5 pcs. / box
	white	5506 / 005-03-S	8 mm - 20 mm	24 cm	5 pcs. / box
	black	5006 / 005-03-S	8 mm - 20 mm	24 cm	5 pcs. / box
Sealing sleeve E					
	light grey	5106 / 002-00	40 mm - 160 mm	max. 18 cm	5 pcs. / box
	white	5506 / 002-00	40 mm - 160 mm	max. 18 cm	5 pcs. / box
	black	5006 / 002-00	40 mm - 160 mm	max. 18 cm	5 pcs. / box
<i>with stainless steel clamping ring for upper securement</i>					
Sealing sleeve G					
	light grey	5106 / 007-04	26 mm	22 cm	5 pcs. / box
	white	5506 / 007-04	26 mm	22 cm	5 pcs. / box
		-			
<i>With shrink tubing for upper protection, otherwise identical to sleeve G</i>					
Sealing sleeve GS					
	light grey	5106/007-04-S	26 mm	22 cm	5 pcs. / box
	white	5106/005-04-S	26 mm	22 cm	5 pcs. / box
Sealing sleeve H					
	light grey	5106/008-04	35 mm - 90 mm	max. 18 cm	5 pcs. / box
	white	5506/008-04	35 mm - 90 mm	max. 18 cm	5 pcs. / box
<i>With shrink tubing for upper protection, otherwise identical to sleeve H</i>					
Sealing sleeve HS					
	light grey	5106/008-04	35 mm - 90 mm	max. 18 cm	5 pcs. / box
	white	5506/008-04	35 mm - 90 mm	max. 18 cm	5 pcs. / box

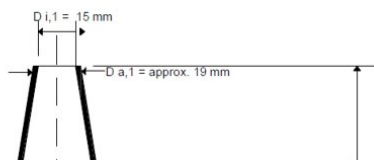

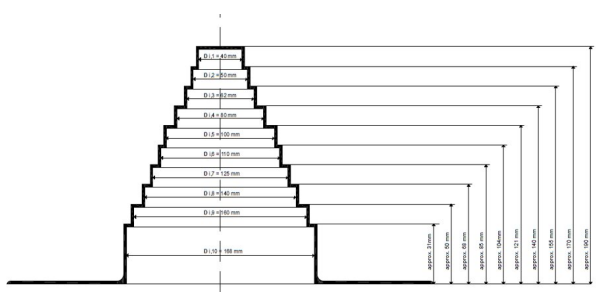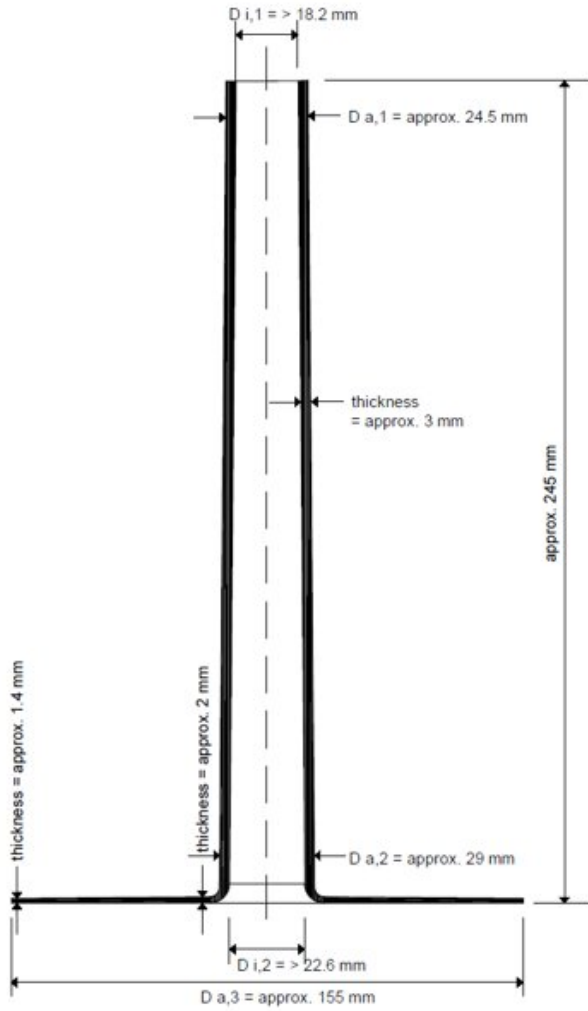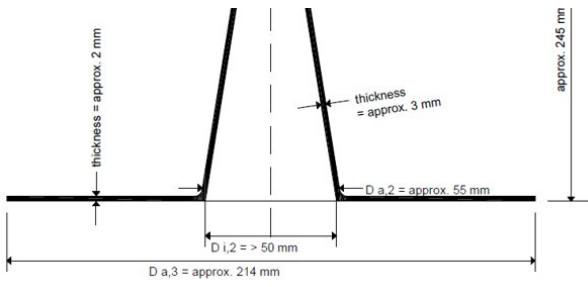

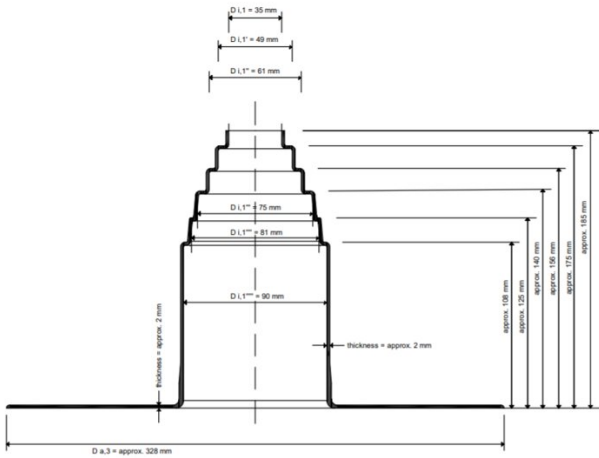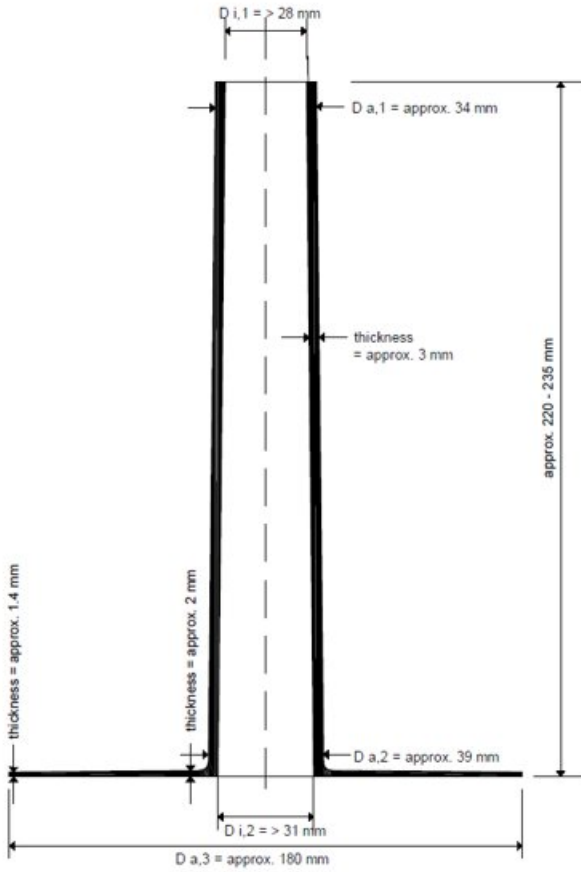

The declared data are indices based on the statistical quality control and refer to the date of production. Consider state of the art, standards, legal provisions and guidelines for the suitability of the mentioned field of application and application method. All specifications are without obligation. The user must assess the suitability of the product for the particular purpose and ensure the user's access to the current version of the product data sheet.

Subject to alteration without notice.

Storage conditions: The products have to be stored in original packaging, being protected from direct sun light, UV-beams and extreme conditions like heat, frost, moisture, etc. During cold season store the products in a frost-free area (+5°C) for 12 hours before application.

Development, Production and Sales of our products according to ISO 9001.